


My signature certifies that the measurements entered on this specification sheet are accurate and I assume responsibility for the accuracy. Revision # _____

FIKSE

Signature _____

NAME _____

PHONE NUMBER _____

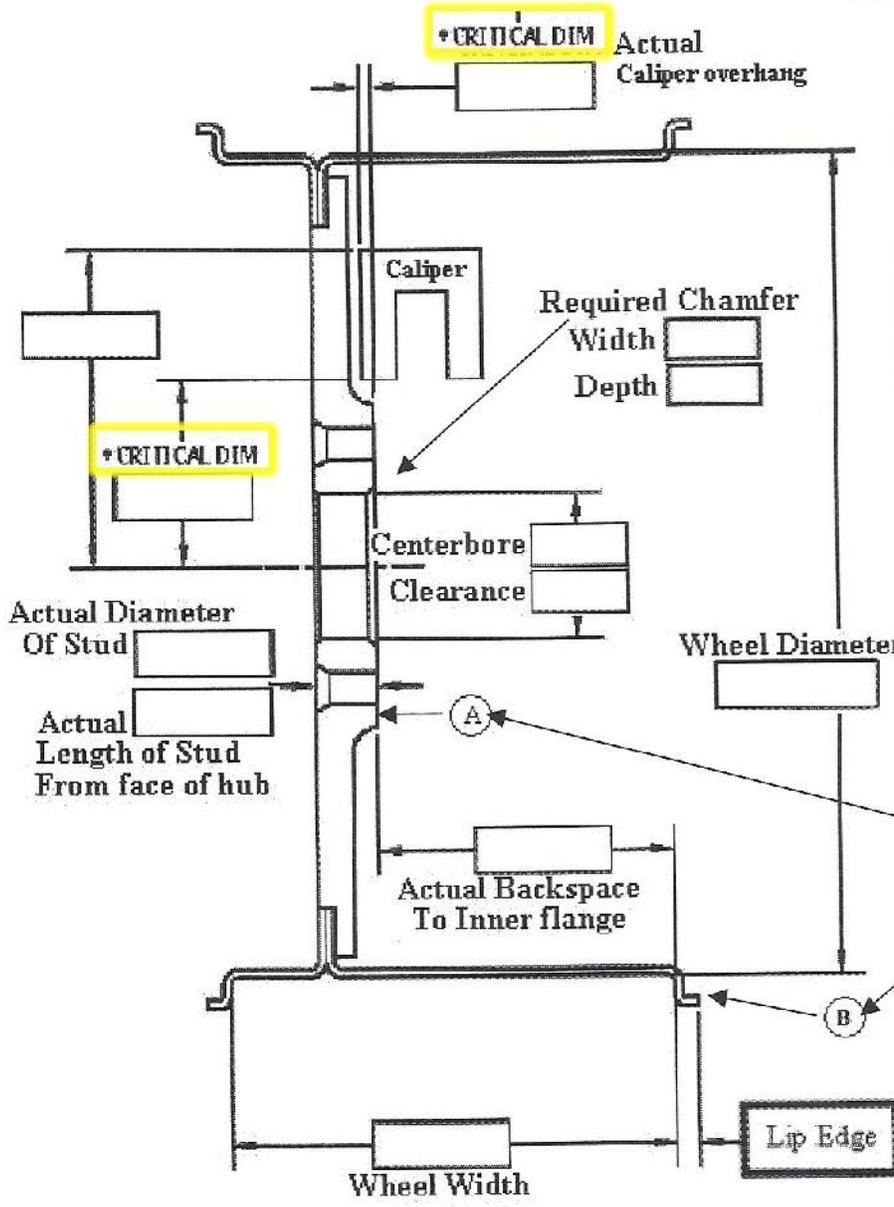

<input type="text"/>	<input type="text"/>
BOLT CIRCLE DIA. Eg. 4 X 100mm 4 X 4.5 5 X 4.5 4 X 3.75	COUNTERSINK Eg. 60 ° 45 ° Ballseat
CAR TYPE	<input type="text"/>
CAR WEIGHT	<input type="text"/>
G-LOAD CAPACITY	<input type="text"/>

Measuring backspace:
from Hub mounting surface to Inner Flange

The backspace measurement is the distance from the hub-mounting surface (A), To the outside edge of the inner shell (B),

FRONT QTY

REAR QTY

Valve core style: Rubber standard, metal optional. Some wheel fitment packages utilize rubber only.

Please Note: Chosen finishes may alter the dimensions slightly. Please take this into consideration when filling out this spec sheet. EG. Anodizing reduces the bore size by .003 inches.